QUALITY COATED ABRASIVES

ZK765X
for flap discs

- Faster Cut
- Long Life
- Secure Solution
- Easy to convert

ZK765X for flap discs

ZK765X has been specially designed for flap disc manufacturers to be used in their tools for high cut rate, long life and superior metal removal. This material is supplied in rolls with tight width tolerances for excellent use in conversion.

Faster Cut

- **Aggressive cut** of zirconia alumina with grinding additives together with optimized grain coating technology

Long Life

- **100% self sharpening** zirconia alumina
- **Superior grain adhesion** due to specially treated grains
- **Optimum wear properties** of the very robust combination cloth backing

Secure Solution

- Designed for **optimum adhesion** to flap disc backings to resist high rotational forces for safe operation

Easy to convert

- **Precise width tolerances** when slitting rolls
- **Very high bonding properties** of combination cloth backing
- **High heat stability of blue colouring**

Technical Data	
Grain size:	Zirconia alumina
Grit size:	36, 40, 60, 80, 120
Backing:	Cotton/Polyester mix
Bonding:	Full resin bonded
Width:	1,480 mm
Process:	Slit Rolls

Applications	
Material:	Non-alloy and low alloy steel, chrome and chrome-nickel steel, high-alloy steel, cast iron
Grinding process:	Grinding of weld seams, surface and edge grinding
Workpiece:	Sheet metal, castings, forgings, metal fabrications
Operation:	Hand held grinding machines

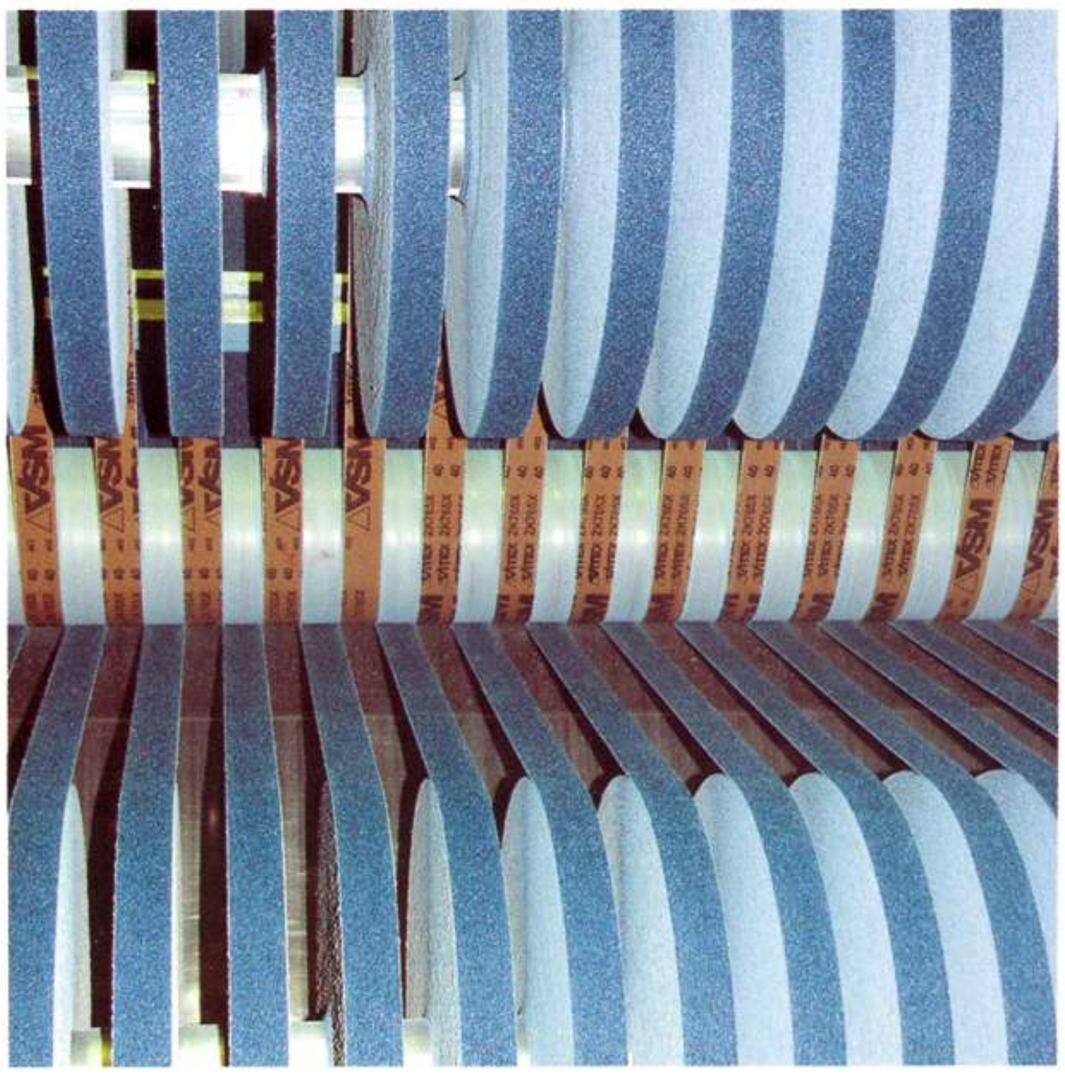

Exact cutting on roll slitter

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17 · D-30165 Hannover · Germany
Tel.: +49 5 11 35 26-0 · Fax: +49 5 11 3 52 13 15
E-mail: info@vsmag.de · Internet: www.vsmag.de

We reserve the right to make technical modifications · VSM · ZK765X/26.11/10.03/e